


LTD8320 : GEN 2 CYLINDER LED TRACK HEAD (2CCT/2NT) 1600LM (12W)

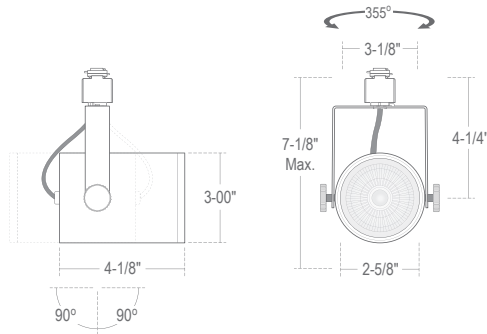

SPECIFICATION

120V 12W

Application: Architecturally styled Cylinder LED track head features a durable steel body and futuristic alloy heat sink. It's small, unobtrusive size make it ideal for retail, commercial and residential applications requiring stylish design and true PAR20 performance.

Connector: LITON track fixtures come standard with 3-Wire H-Type track connections. Fixture is factory preset for installation on single-circuit track. J-Type and L-Type connections are available with extended lead times - consult factory.

Aiming Mechanism: Unobtrusive internal aiming mechanism allows maximum adjustability while rigidly maintaining desired positioning using no visible knobs, wires or screws.

Driver: Electronic Constant Current driver integrally mounted in fixture casing.

Control: Works with standard incandescent dimmers and ELV Dimmers. Factory qualified for use with Luton brand dimmers: S600PR, DVSCCL-153P & DV600PR as well as Leviton IP106-600W.

Lumen Maintenance: Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral aluminum heat sink for maximum heat rejection to provide long LED life.

Safety Labels: ETL/CETL listed. Suitable for dry locations only.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

COMPATIBILITY

 LP913 LINE VOLTAGE ROUND CANOPY	 LP971 LINE VOLTAGE SQUARE CANOPY	 PT57 PLUG-IN CLAMP ADAPTER
 PT58 LINE VOLTAGE CLAMP ADAPTER	 LP 1 CCT TRACK CHANNEL	 LPC 2 CCT TRACK CHANNEL

Note: Wattage limitations on compatible items must be met.

LED Details:

20W 1600 Lumens Delivered
Color Rendering Index (CRI): 90
Color Temperature: 3,000K
Lamp Equivalents: 100W PAR20

Benefits:

- High Quality 80 & 90 CRI
- Sleek Unobtrusive Design
- Concealed heat sink and LED driver
- For use with standard H-Style 1 circuit and 2 circuit track
- Precision design ensures firm positioning
- Highly adjustable, 355° Rotation/0°-90° Gimbal
- "Zero Percent Dimmin Standard" Smoothly Dims to completely off with Standard Incandescent Dimmers
- Standard with 2-Wire Incandescent Dimmers and 3-Wire ELV Dimmers.

FEATURE:



ORDERING EXAMPLE : LTD8320W-B15-T27

LTD8320	FINISH	CONTROL	BEAM SPREAD	COLOR TEMPERATURE	ACCESSORIES	CONNECTOR OPTION
LTD8320	W :All White	Blank :2-Wire/ Incandescent/ ELV Dimming (120V)	Blank :40° Flood -B15 :15° Spot -B25 :25° Narrow Flood	-T27 :2700K (90CRI) -T30 :3000K (90CRI) -T40 :4000K (80CRI)	-SNT :Snoot	Blank :1CCT/1NT Connector -2C2N :2CCT/2NT Connector -3C1N :3CCT/1NT Connector